

PANELS – BamWood®

Panels 16mm – 3 layers

Dimensions : 16 x 1220 x 2440

Weight : 45.73 kg

Color Caramel PB20BC1220



Panels 20 mm – 3 layers

Dimensions : 20 x 1220 x 2440

Weight : 49.79 kg

Color Caramel PB20BC1220

Color Naturel PB20BN1220

Color Nairobi PB20BNA1220



Panels 40 mm – 5 layers

Dimensions : 40 x 710 x 2440

40 x 650 x 3050

40 x 1220 x 2440

Weight : 56.75 kg / 65 kg / 97 kg


Color Caramel PB40BC650

PB40BC1220

Color Champagne PB40CH650

PB40CH1220

Color Nairobi PB40BNA710

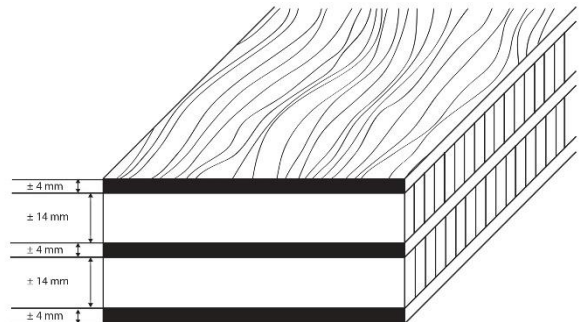

Coating: Our panels are delivered untreated, we recommend to finish them with Woca® oil or Bona® varnish.

Maintenance : According to chosen coating

Storage : The panels should be stored flat

Wrapping : individual in cardboard



Technical characteristics:

BRINELL HARDNESS	86 N/mm ² - norm EN 1534 (Report CTIB 5229/2)
CONTRACTION COEFFICIENT	0,14% per % humidity variation
HUMIDITY CONTENT	10% at 20 °C and 65% relative humidity 8% at 20 °C and 50% relative humidity
DENSITY	1050 kg/m ³ for the Bamwood, 740kg/m ³ for inner part
FORMALDEHYDE EMISSION	0,04 mg/ m ² h - norm EN 717-2 (Report CTIB 5229/2)
THERMIC RESISTANCE	0,072 m ² ·K/W - norme EN 12664 (Report CTIB 5229/2)
PCP CONTENT	Below detection limit

