

**BUDGET Range - Solid bamboo flooring Fishbone**

F10BOCBR95  
F10BOCHBR122

**Dimensions:** 10 x 95 x 855 mm – Caramel  
10 x 122 x 610 mm - Champaign

**Coating:** Factory applied WOCA oil layer - matt appearance

**Colors :** Caramel, Champagne


**Chamfer:** GO2

**Installation:** Glued: Yes  
Floating: No  
Floor heating: Yes if glued pose  
Use in bathroom: Yes if glued pose

**Wearing surface:** ± 4 mm

**Box :** Content: Caramel 24 plks/box 1.95 m<sup>2</sup>  
Champaign 24 plks/box 1.786 m<sup>2</sup>  
Each box contains same number of left and right tongue and groove planks  
Weight: 19.58 kg (caramel) 21.1 kg (Champaign)

**Maintenance :** cfr maintenance instructions

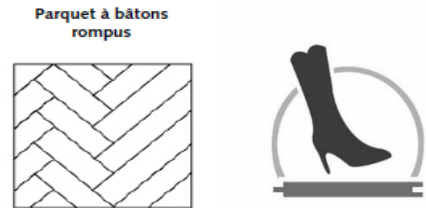

BRINELL HARDNESS	86.5 N/mm <sup>2</sup> - EN 1534 norm (Rapport CTIB 5229/2)
CONTRACTIONCOEFFICIENT	0,14% per % Humidity variation
HUMIDITY DEGREE	10% at 20 °C and 65% relative humidity 8% at 20 °C and 50% relative humidity
DENSITY	1100 kg/m <sup>3</sup>
FIRE NORM	CFLS1 if glued pose
FORMALDEHYDE EMISSION	0,04 mg/ m <sup>2</sup> h - EN 717-2 norm (Report CTIB 5229/2)
THERMIC RESISTANCE	0,05 m <sup>2</sup> K/W - EN 12664 norm (Report CTIB 5229/2)
THERMIC CONDUCTION	0.20 W/mK
PCP CONTENT	Below detection limit (Report CTIB 5229/2)
VOC FREE	Below detection limit – EN 15052 norm

**Do not forget the accessories !**

